


Cat 5E FTP PVC Cable

Eland Product Group **A8N**

Application

A multipair (usually 4 pair) high performance cable that consists of twisted pair conductors, used mainly for data transmission. Category 5E is recommended for all new installations, supports a frequency range of up to 100MHz and is designed for transmission speeds of up to 1 gigabit per second (Gigabit Ethernet).

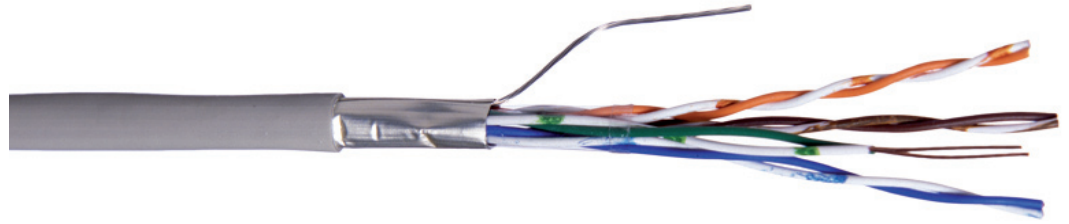

Standards

ISO/IEC 11801, TIA/EIA 568B

Conductor

Class 1 solid plain copper

Insulation

HDPE (High Density Polyethylene)

Drain Wire

Tinned copper

Screen

Al-Foil (Aluminium Foil)

Sheath

PVC (Polyvinyl Chloride)

Sheath Colour

Grey

Temperature Rating

70°C

Minimum Bending Radius

90°

Core Identification

4 Pairs: Blue + White/Blue, Orange + White/Orange, Green + White/Green, Brown + White/Brown

Dimensions

Eland Part Number	No. of Pairs (24 AWG)	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Weight kg/305m box
A8NFORCE5EFTP	4	1.03	6.10	14

Performance Characteristics

Frequency MHz	Attenuation dB/100m	NEXT dB	PS-NEXT dB	RL dB	ELFEXT dB	PS-ELFEXT dB/100m	Delay ns
1.00	2.0	65.3	62.3	20.0	64.0	61.0	570.00
4.00	4.1	56.3	53.3	23.0	52.0	49.0	552.00
8.00	5.8	51.8	48.8	24.5	45.9	42.9	546.73
10.00	6.5	50.3	47.3	25.0	44.0	41.0	545.38
16.00	8.2	47.2	44.4	25.0	39.9	36.9	543.00
20.00	9.3	45.8	42.8	25.0	38.0	35.0	542.05
25.00	10.4	44.3	41.3	24.3	35.8	33.0	541.20
31.25	11.7	42.9	39.9	23.6	34.1	31.1	540.44
62.50	17.0	38.4	35.4	21.5	28.1	25.1	538.55
100.00	22.0	35.3	32.3	20.1	24.0	21.0	537.60

Electrical Characteristics

Eland Part Number	Impedance ohms	Max Conductor Resistance ohms/Km	Maximum Resistance Unbalance % max
A8NFORCE5EFTP	100±15	93.8	2.5

