


# Long Palm Lugs

Eland Product Group **FCA**

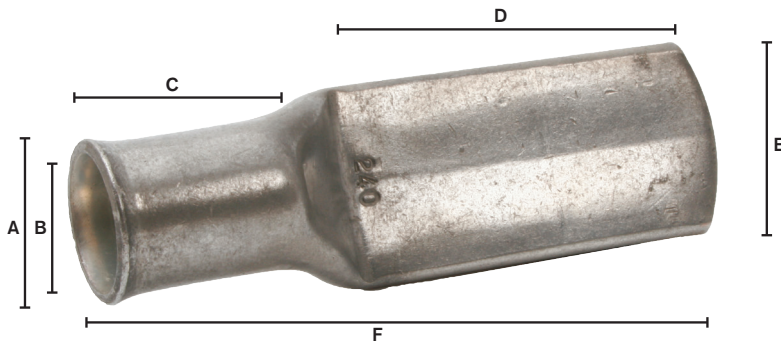

## Application

Long palm lugs are used to connect a cable to its electrical source. The long palm provides added connectivity through a larger surface area for secure connection.

## Note

Available blank or drilled

## Dimensions

Eland Part Number	Cable Size mm <sup>2</sup>	Nominal Dimensions mm						Palm Thickness
		A	B	C	D	E	F	
FT10/LP	10.00	6.9	4.4	10.0	35.0	11.0	50.0	2.0
FT16/LP	16.00	8.0	5.6	11.0	35.0	11.0	52.0	2.2
FT25/LP	25.00	9.5	7.0	13.0	35.0	13.5	56.0	2.4
FT35/LP	35.00	11.0	8.2	18.0	35.0	15.5	57.0	2.8
FT50/LP	50.00	12.0	9.5	18.0	35.0	17.0	61.0	2.4
FT70/LP	70.00	15.0	11.5	18.0	75.0	21.2	105.0	2.0
FT95/LP	95.00	17.0	13.5	24.0	75.0	24.3	111.0	3.5
FT120/LP	120.00	19.0	15.0	27.0	75.0	27.2	115.0	4.0
FT150/LP	150.00	21.0	16.5	27.0	75.0	30.0	120.0	4.5
FT185/LP	185.00	23.0	18.5	30.0	75.0	33.5	125.0	4.5
FT240/LP	240.00	26.0	21.0	32.0	75.0	37.7	128.0	5.0
FT300/LP	300.00	28.0	23.0	37.0	75.0	41.0	137.0	5.0
FT400/LP	400.00	32.0	27.0	38.0	75.0	47.3	138.0	5.0
FT500/LP	500.00	38.0	30.0	50.0	75.0	55.0	160.0	8.2
FT630/LP	630.00	44.0	33.8	50.0	75.0	63.0	164.0	10.2
FT800/LP	800.00	49.0	38.0	56.0	75.0	70.0	171.0	11.0

The information contained within this datasheet is for guidance only – actual cable dimensions should be considered before making final selection as these may vary due to manufacturing tolerances.