

# Long Palm 2 Hole Fixing Lugs

Eland Product Group FCA

## Application

Long palm two hole fixing lugs are used to connect a cable to its electrical source. The long palm provides added connectivity through a larger surface area for secure connection.

## Details

Extended Palm 2 Hole Fixing Lugs - Type EP

## Standards

BS4579

## Palm Length


75.0mm

## Stud Size

12.5mm

## Stud Spacing

45.0mm

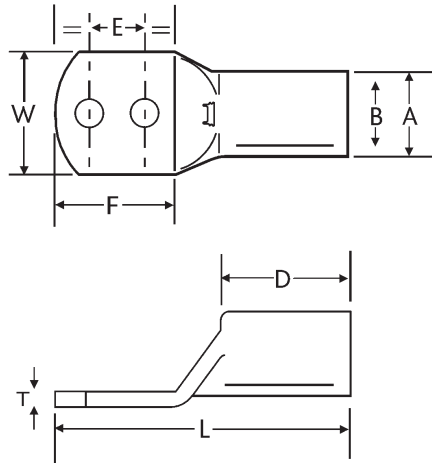

Eland Part Number	Total Length	Total Width	Entry Width		Nominal Dimensions			
	L	W	B	A	E	F	D	T
	mm	mm	mm	mm	mm	mm	mm	mm
FT70/LP	105	21.2	11.5	15	45	75	18	2.0
FT95/LP	111	24.3	13.5	17	45	75	24	3.5
FT120/LP	115	27.2	15.0	19	45	75	27	4.0
FT150/LP	120	30.0	16.5	21	45	75	27	4.5
FT185/LP	125	33.5	18.5	23	45	75	30	4.5
FT240/LP	128	37.7	21.0	26	45	75	32	5.0
FT300/LP	137	41.0	23.0	28	45	75	37	5.0
FT400/LP	138	47.3	27.0	32	45	75	38	5.0
FT500/LP	160	55.0	30.0	38	45	75	50	8.2
FT630/LP	164	63.0	33.8	44	45	75	50	10.2
FT800/LP	171	70.0	38.0	49	45	75	56	11.0